



# LED EXIT & EMERGENCY LIGHTING | DECORATIVE EMERGENCY LIGHTS

## DBEL




### TECHNICAL SPECIFICATIONS:

- :: Universal 120-277VAC voltage
- :: Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing
- :: 4.8V long life, maintenance-free, rechargeable NiCd battery
- :: Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination
- :: Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours
- :: Self-diagnostic test feature continually diagnoses units performance and tests system to ensure reliable operation and to meet electrical and life safety codes
- :: Field-selectable wiring allows for "AC" operation of the unit to be controlled using a wall-switch or a photocell or any other switching mechanism



G6

DECORATIVE EMERGENCY LIGHTS

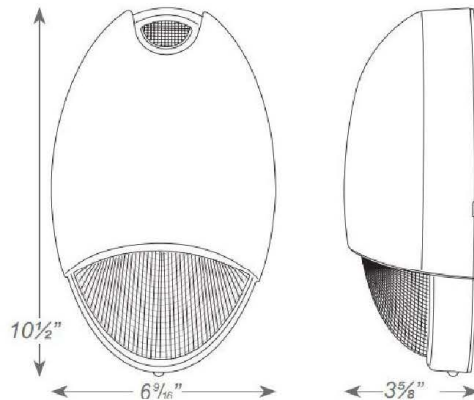

## DECORATIVE OUTDOOR LED AC/EMERGENCY UNIT (CAN BE SET ON ALL NIGHT)

CATALOG NO.	HOUSING COLOR	OPTIONS
DBEL-ACEM-HL	W White B Black BR Gray (with white face plate) N Nickel	CW Cold Weather PC Photocell Sensor (Standard) SDT Self Diagnostics (Standard)

WESTGATE MFG

WWW.WESTGATEMFG.COM TOLL FREE: 877.805.2252 FAX: 877.809.2252

